


# 01-30SERIES

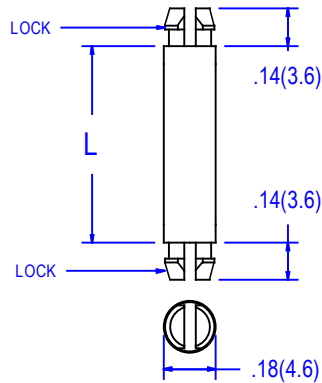

**.152 ± .003 ( 3.86 ± 0.08) DIA. HOLE.**  
**1/16 (1.6) PANEL THICKNESS, BOTH ENDS**

ITEM NO.	DIM L	
	Inches ±.015	mm ±0.38
01-30-20	.125	3.2
01-30-30	.187	4.8
01-30-40	.250	6.4
01-30-50	.312	7.9
01-30-60	.375	9.5
01-30-70	.437	11.1
01-30-80	.500	12.7
01-30-90	.562	14.3
01-30-100	.625	15.9
01-30-110	.687	17.5
01-30-120	.750	19.1
01-30-130	.812	20.6
01-30-140	.875	22.2
01-30-160	1.00	25.4
01-30-180	1.13	28.6
01-30-200	1.25	31.7
01-30-220	1.38	34.9
01-30-240	1.5	38.1

PACKAGING: 1000 PCS PER BAG

MATERIAL	NYLON 66
UL RATING	94V-2
UL FILE NO.	R70062
COLOR	NATURAL
RoHS COMPLIANCE	YES
TEMP. RANGE (REF.)	-40 to 185°F (-40 to 85°C)
MR NUMBER	01

NYLON 66 RATED UL94V-0 AVAILABLE ON REQUEST.  
 TO ORDER ADD SUFFIX "X" TO PART NO.

				ALL ELECTRONICS HARDWARE, INC. 2642 CORPORATE PARKWAY ALGONQUIN, IL. 60102 1-800-778-7234	PC SUPPORTS, dual lock File No. 01-30SERIES	10/23/20 
No	Revision	Date	Init			