


01-04

TO LOCK IN A .187 ±.003 (4.75±0.08) DIA. HOLE,
.032 TO .090 (.8 - 2.3) PANEL THICKNESS

ITEM NO.	L	
	Inches ± .015	(mm) (± 0.4)
01-04-30	.187	(4.8)
01-04-40	.250	(6.4)
01-04-50	.312	(7.9)
01-04-60	.375	(9.5)
01-04-70	.437	(11.1)
01-04-80	.500	(12.7)
01-04-10	.625	(15.9)
01-04-120	.750	(19.1)
01-04-140	.875	(22.2)
01-04-160	1.00	(25.4)
01-04-180	1.12	(28.6)
01-04-200	1.25	(31.8)
01-04-220	1.38	(34.9)

PACKAGING = 500 PCS. PER BAG

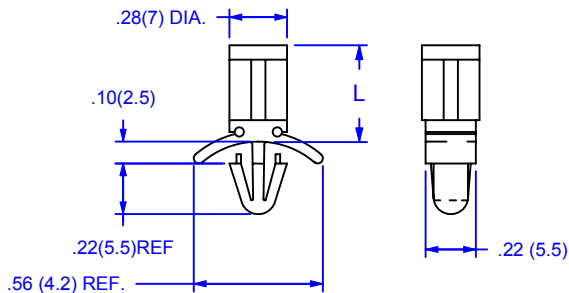


01-04A

TO LOCK IN A .187 ±.003 (4.75± 0.08) DIA. HOLE.
.04 TO .078 (1-1.57) PANEL THICKNESS

ITEM NO.	L	
	Inches ± .015	(mm) (± 0.4)
01-04A-30	.187	(4.8)
01-04A-40	.250	(6.4)
01-04A-50	.312	(7.9)
01-04A-60	.375	(9.5)
01-04A-70	.437	(11.1)
01-04A-80	.500	(12.7)
01-04A-100	.625	(15.9)
01-04A-120	.750	(19.1)
01-04A-140	.875	(22.2)
01-04A-160	1.00	(25.4)
01-04A-180	1.12	(28.6)
01-04A-200	1.25	(31.8)
01-04A-220	1.38	(34.9)

PACKAGING = 500 PCS. PER BAG

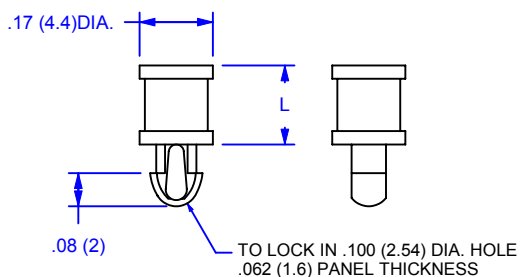

01-29

TO LOCK IN .100 (2.54) DIA. HOLE
.062 (1.6) PANEL THICKNESS

MATERIAL	NYLON 66
UL RATING	94V-2
UL FILE NO.	R70062
COLOR	NATURAL
ASTM	D 4066, PA111
RoHS COMPLIANCE	YES
TEMPERATURE RANGE (REF.)	-40 to 185°F (-40 to 85°C)
MR NUMBER	01

ITEM NO.	L	
	Inches ±.015	mm ±0.4
01-29-10	.062	1.6
01-29-20	.125	3.2
01-29-30	.187	4.8
01-29-35	.209	5.3
01-29-40	.250	6.35
01-29-50	.312	7.9
01-29-60	.375	9.5
01-29-70	.437	11.1
01-29-80	.500	12.7
01-29-90	.563	14.3
01-29-100	.625	15.9
01-29-120	.750	19.1
01-29-130	.813	20.6
01-29-140	.875	22.2
01-29-160	1.00	25.4

PACKAGING = 1000 PCS. PER BAG

V-0 RATED NYLON AVAILABLE ON REQUEST.
TO ORDER ADD SUFFIX " X" TO PART NUMBER

				ALL ELECTRONICS HARDWARE , INC. 90 NORTH LIVELY BLVD. ELK GROVE VILLAGE, ILLINOIS 60007-1317 TEL.1-800-778-7234	PCB PUSH SPACERS		10-4-05
No	Revision	Date	Init.		File No.	010429CAT	